



BIFACIAL MODULE WITH DUAL GLASS

RS5J-610~635NBG-E1

N-Type /Positive power tolerance of 0~+3%/Max module efficiency 23.51%

- Suitable for Ground Power Plants and Distributed Projects
- Advanced Module Technology Delivers Superior Module Efficiency
 - Non destructive cutting · MBB half-cut
- Excellent Power Generation Performance
 - Excellent IAM and low irradiation performance · Lower temperature coefficient
 - 0.40% linear Power decline
- High module Quality Ensures Long-term Reliability
 - Strict selected material · Advanced technology · Leading standard
- Enhanced Mechanical Load
 - Mechanical performance up to 5400pa positive load and 2400pa negative load




Complete System and IEC Product Certification

IEC 61215(2016), IEC 61730(2016) ISO9001:
2015: Quality Management System ISO14001:
2015: Environment Management System
ISO45001: 2018: Occupational Health and Safety Management System

15 -Year Material & Workmanship

30 -Year Linear Power Output

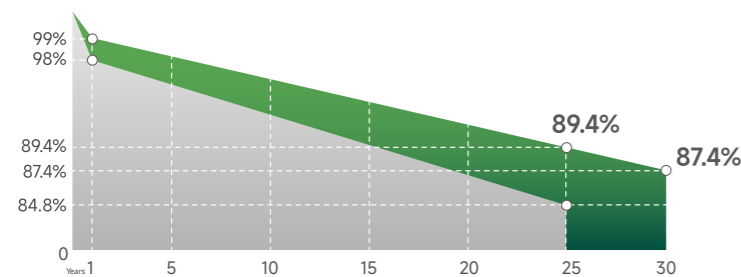


30-Year Excess Linear Power Output Warranty

BLOOMBERG
TIER 1
Global
Leading Brand




RS5J-610~635NBG-E1

BIFACIAL MODULE WITH DUAL GLASS

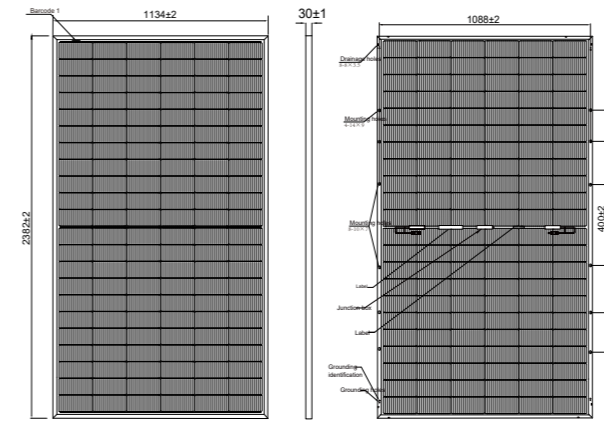

Drawing Only for Reference

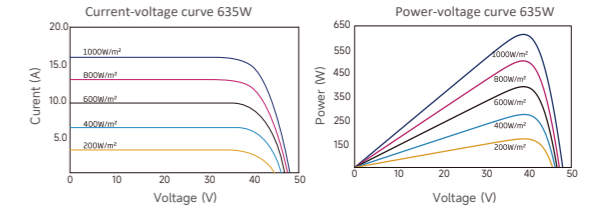

Electrical Characteristics STC	RS5J-610NBG-E1	RS5J-615NBG-E1	RS5J-620NBG-E1	RS5J-625NBG-E1	RS5J-630NBG-E1	RS5J-635NBG-E1
Maximum Power (Pmax)	610W	615W	620W	625W	630W	635W
Power Tolerance	0~+5W	0~+5W	0~+5W	0~+5W	0~+5W	0~+5W
Module Efficiency	22.58%	22.77%	22.95%	23.14%	23.32%	23.51%
Maximum Power Current (Imp)	15.08A	15.15A	15.22A	15.29A	15.36A	15.43A
Maximum Power Voltage (Vmp)	40.46V	40.60V	40.74V	40.88V	41.02V	41.16V
Short Circuit Current (Isc)	15.96A	16.02A	16.08A	16.14A	16.20A	16.26A
Open Circuit Voltage (Voc)	48.68V	48.88V	49.08V	49.28V	49.48V	49.68V

Values at Standard Test Conditions STC (AM1.5, Irradiance 1000W/m², Cell Temperature 25°C)

Electrical Characteristics NOCT	RS5J-610NBG-E1	RS5J-615NBG-E1	RS5J-620NBG-E1	RS5J-625NBG-E1	RS5J-630NBG-E1	RS5J-635NBG-E1
Maximum Power (Pmax)	458W	462W	466W	470W	473W	477W
Maximum Power Current (Imp)	12.18A	12.24A	12.29A	12.35A	12.41A	12.46A
Maximum Power Voltage (Vmp)	37.63V	37.76V	37.89V	38.02V	38.15V	38.28V
Short Circuit Current (Isc)	12.94A	12.99A	13.04A	13.09A	13.15A	13.20A
Open Circuit Voltage (Voc)	45.76V	45.95V	46.14V	46.32V	46.51V	46.70V

NOCT, Irradiance of 800W/m², AM1.5, Ambient Temperature 20°C, wind Speed 1m/s.

Electrical Characteristics With10% Rear Side Power Gain	RS5J-610NBG-E1	RS5J-615NBG-E1	RS5J-620NBG-E1	RS5J-625NBG-E1	RS5J-630NBG-E1	RS5J-635NBG-E1
Maximum Power (Pmax)	671W	677W	682W	688W	693W	699W
Maximum Power Current (Imp)	16.58A	16.66A	16.74A	16.82A	16.89A	16.97A
Maximum Power Voltage (Vmp)	40.46V	40.60V	40.74V	40.88V	41.02V	41.16V
Short Circuit Current (Isc)	17.56A	17.62A	17.69A	17.75A	17.82A	17.89A
Open Circuit Voltage (Voc)	48.68V	48.88V	49.08V	49.28V	49.48V	49.68V

Mechanical Characteristics	
Cell Type	Mono N-Type,132(6×22) Half-Cut cells
Glass	2mm+2mm,High Transmission,Low Iron,Semi-Tempered glass
Frame	Anodized Aluminum Alloy
Junction Box	IP68 Rated
Dimension	2382x1134x30mm
Output Cable	4mm2(EU),+200mm,-300mm or Customized
Weight	32.4kg
Connector	MC4 Compatible

Packing Information	
Container	40' HQ
Pallets per Container	20
Pieces per Container	740

Characteristics	
Temperature Coefficient of Voc	-0.24%/°C
Temperature Coefficient of Isc	+0.04%/°C
Temperature Coefficient of Pmax	-0.29%/°C
Nominal Operating Cell Temperature(NOCT)	43±2°C
Fire Performance	IEC Class C

Remark:Electrical data in this catalog do not refer to a single module and they are not part of the offer.They only serve for comparison among different module types.

Maximum Ratings	
Operating Temperature	-40°C~+85°C
Maximum System Voltage	1500VDC
Maximum Series Fuse Rating	30A



Note: Please read the safety and installation instructions before using this product
©2025 Renesola Co.,Ltd. All rights reserved. subject to change without notice.
Web: www.renesola-energy.com
Version Number: RS5J-001-B-EN

